

Introduction.

Programmer HITAG 3 is used for programming the HITAG 2, HITAG PRO transponders compatible with PHILIPS PCF79xx transponders. It is used for reading / programming of following type transponders PCF7936, PCF7941, PCF7942, PCF7944, PCF7945, PCF7946 ...

New features HITAG 3:

With this tool you can generate with the content for BMW keys and writes them to CAS4 (9S12XDP512). It is also possible to read an external memory key that stores mileage, VIN.

Scope of delivery.

- Programmer HITAG 3.
- USB cable.
- A disc with the software.




Preparation for work.




System requirement

- PC Windows™ XP
- VGA display card (800x600)
- USB ports

Installing the drivers

- Copy the contents of the installation CD to your computer.
- The first time you connect your device, you need becoming driver that comes with the software.

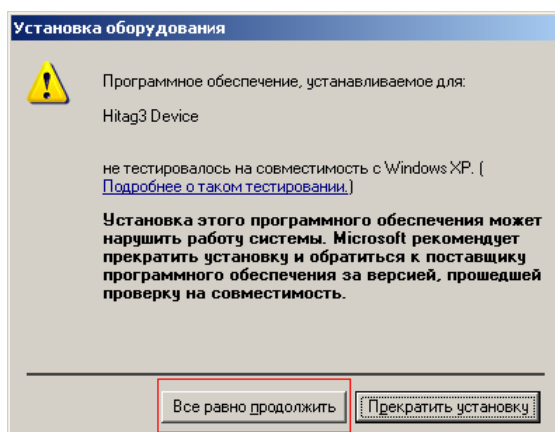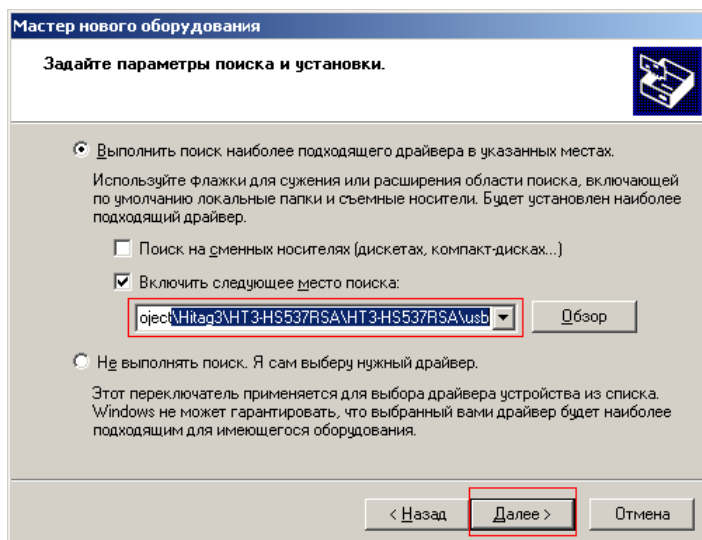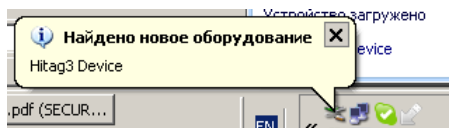

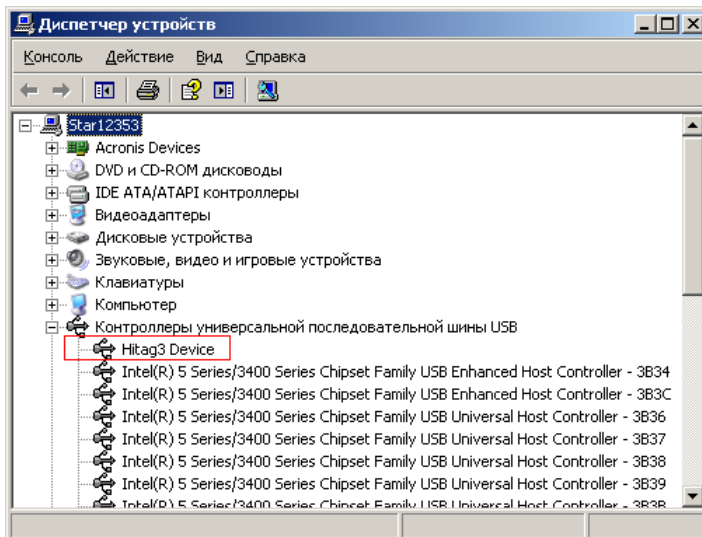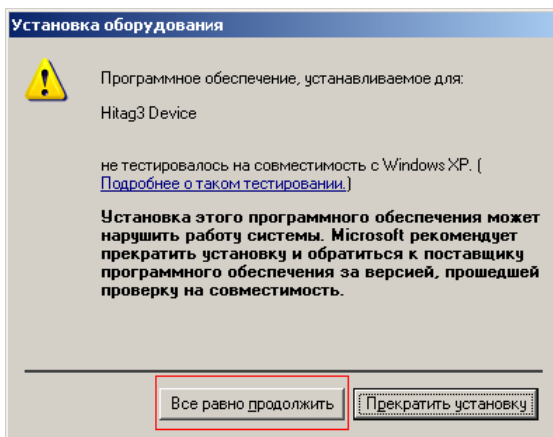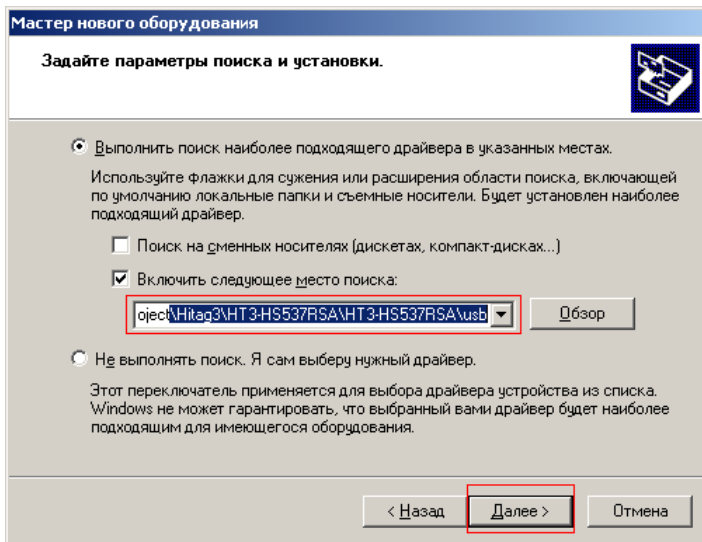


Running the program


- To run the program use a file Hitag3.exe
- Make sure that the program has found a programmer and reported willingness to work.

Key record:


- Connect the programming.

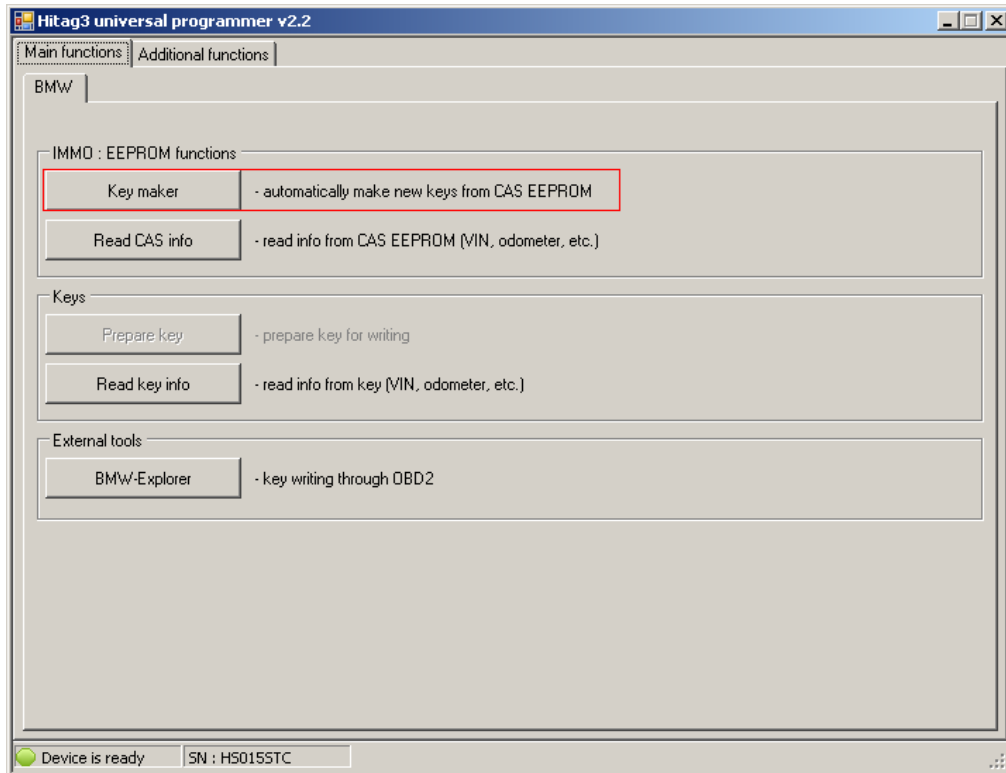


- Pressing the "Key maker" window will load eeprom.

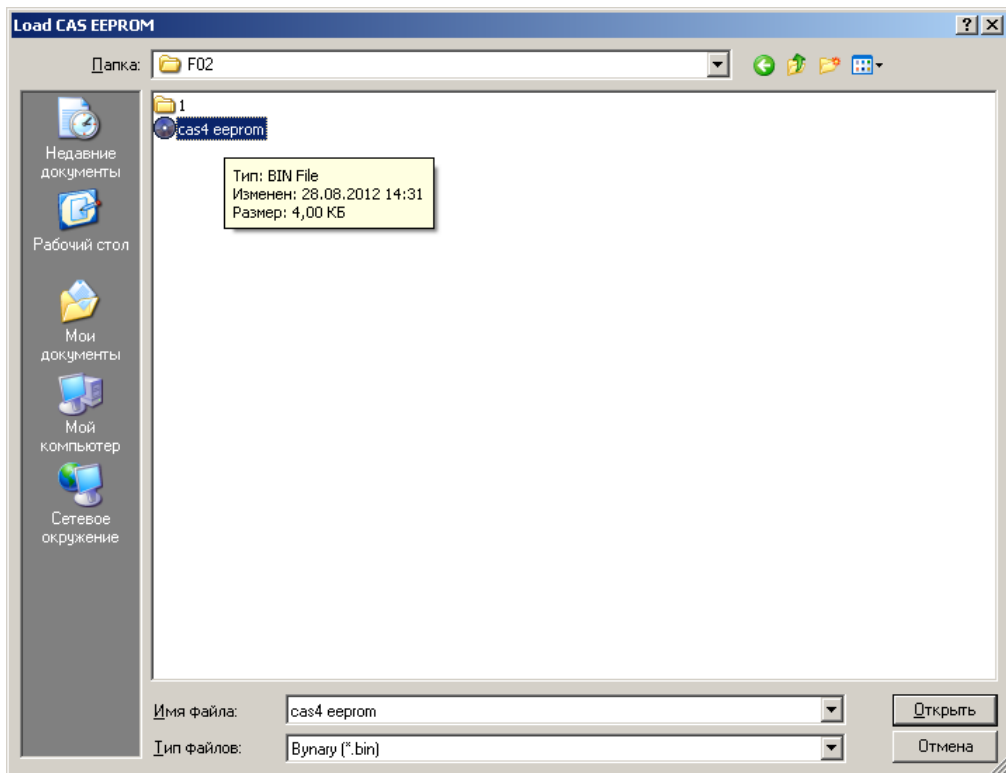

- Select the key number, which you want to write.


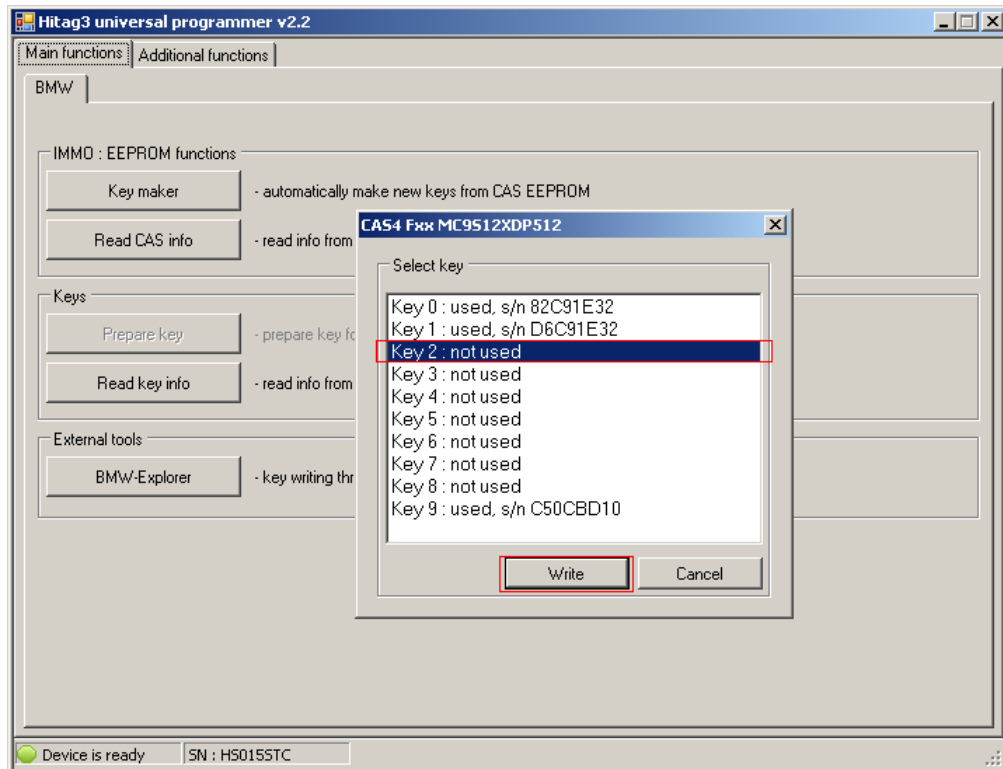


- Set to clear the key programmer to the factory configuration, and click Ok


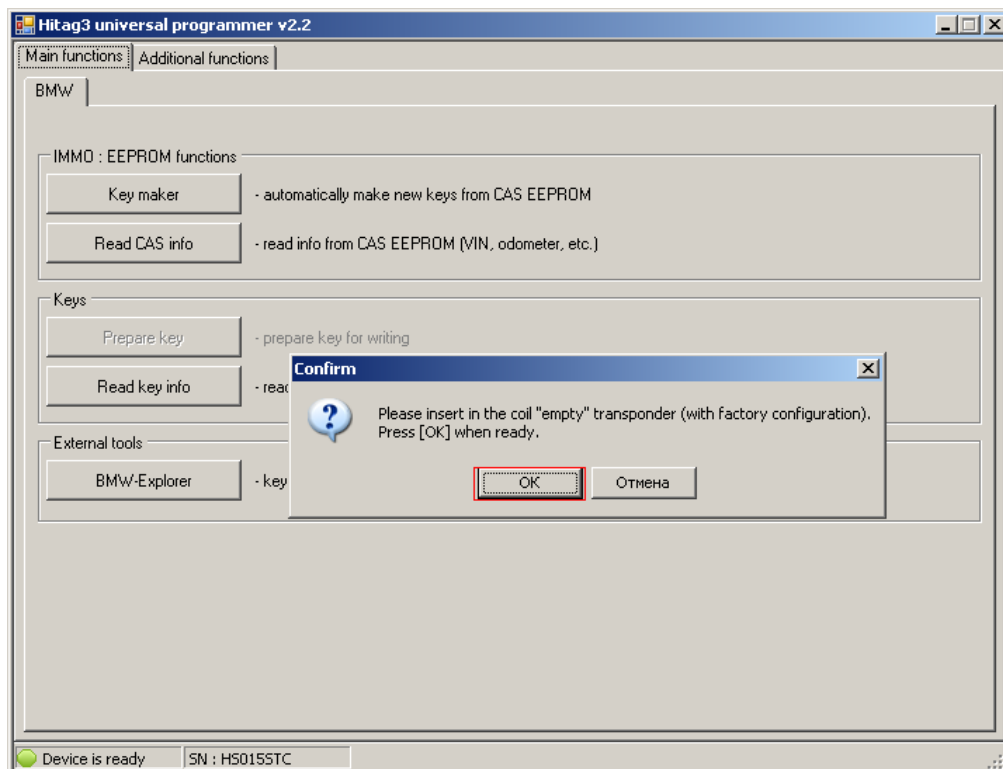


- Wait until recording is complete.
- Bring the key to the "Start of emergency"


Information from CAS:

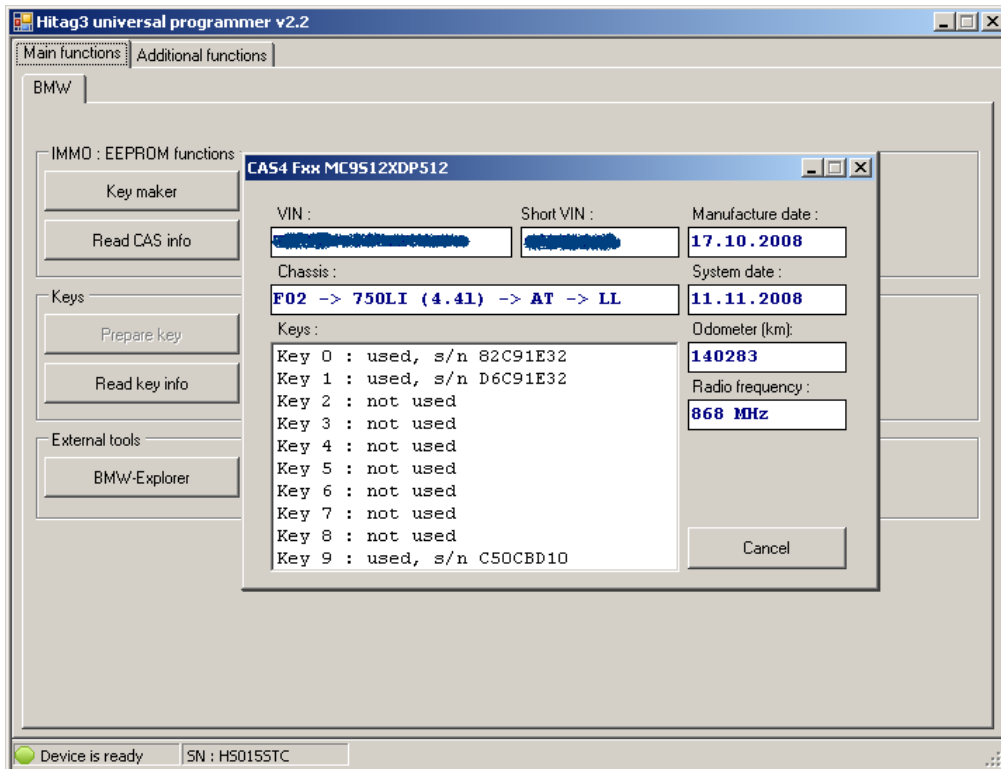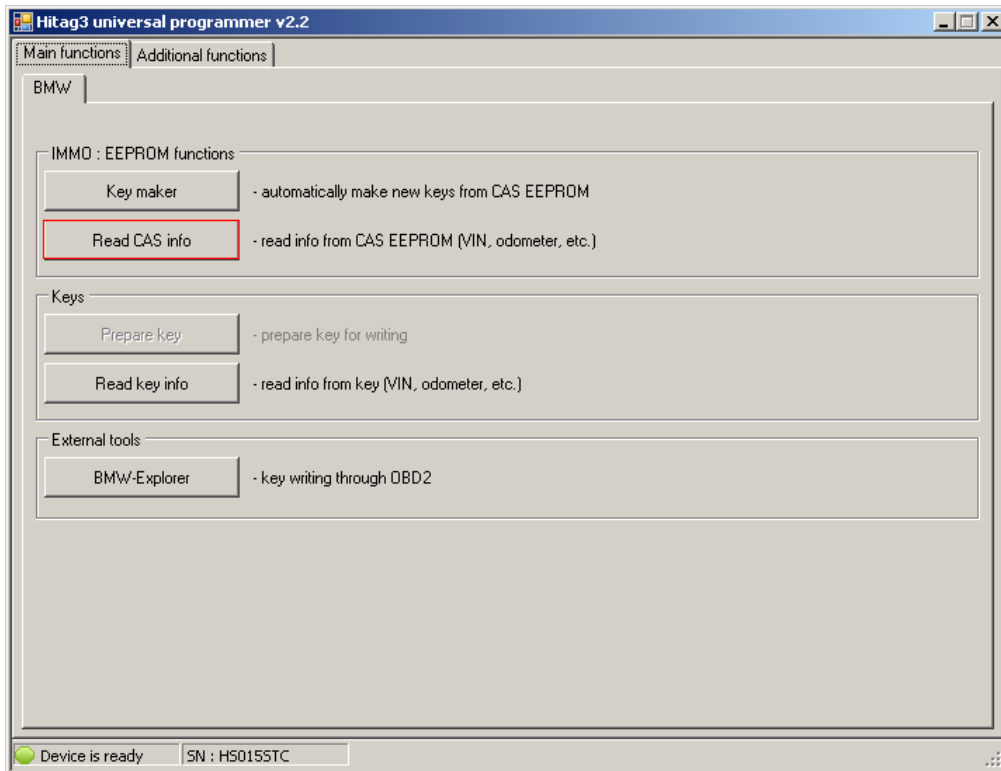

Working with key memory:

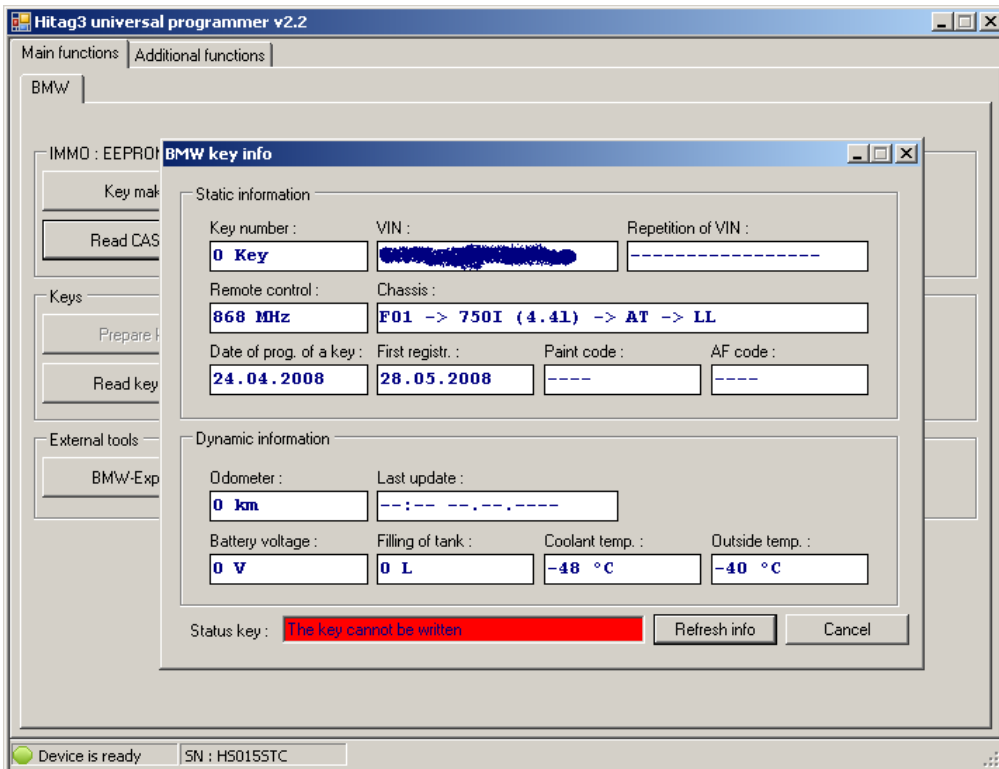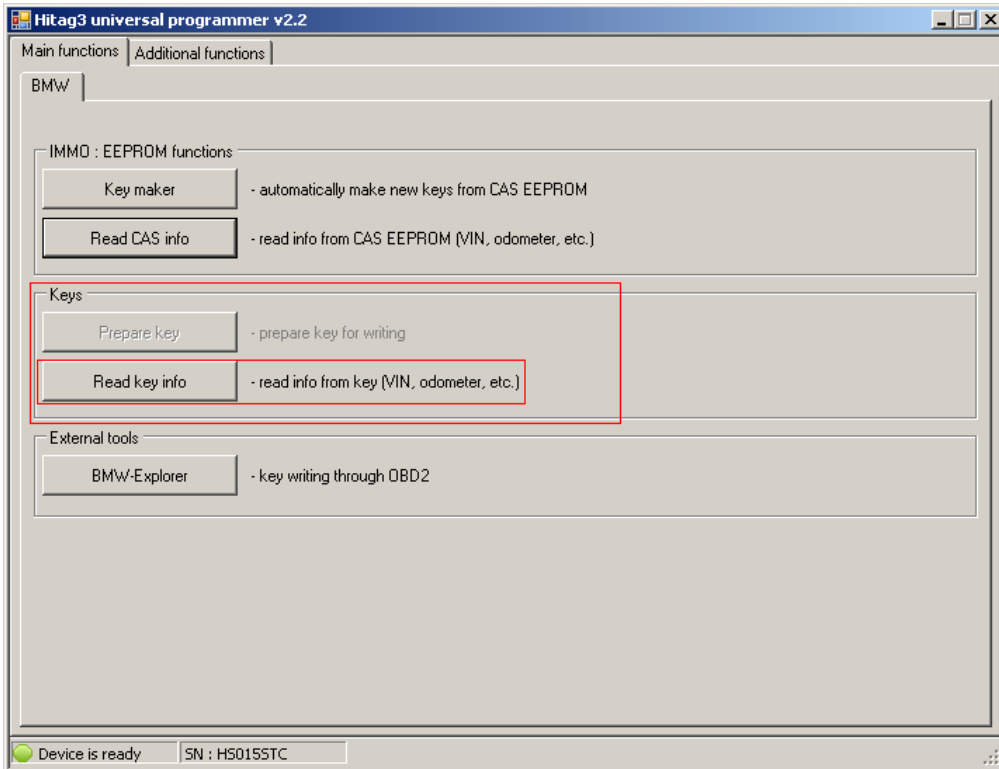

Transponders Hitag 2:

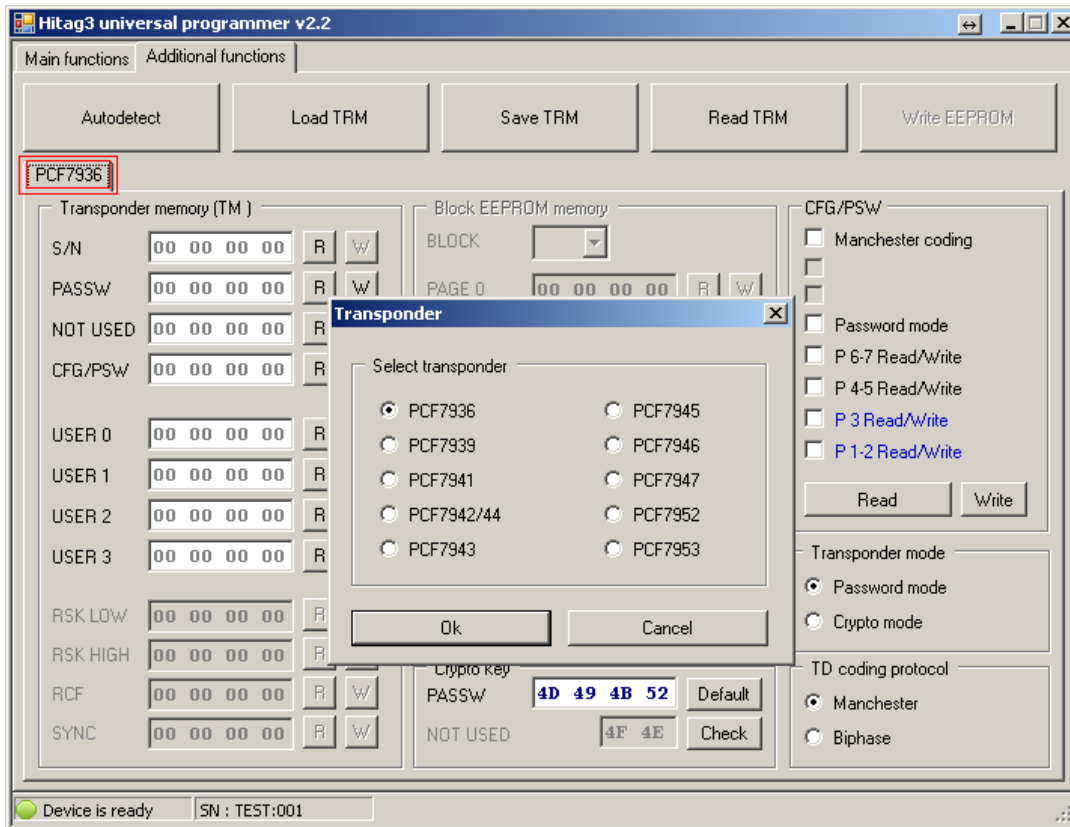

For chip select manually double-click on the tab with a chip

Transponders Hitag Pro:

